



TK1560/T & TK1560/C (NO TOUCH)

Capacitive touch solutions for wide range of industrial & commercial applications

- 1000 nits brightness
- 10-Point Touch
- 1920x1080 resolution
- IP64 Rating
- Metal Housing
- Auto Dimming

15.6" TOUCH SCREEN MONITOR

The monitor comes with a 10-point touch screen and 1000nits high brightness screen panel. The interfaces support a wide range of customisation options in addition to the existing types such as HDMI, VGA, AV, etc. Its IP64 front panel design is a great convenience for installation methods and applications.



IP64 Rating Screen Panel

The front panel is designed to carry IP64 degree of protection which offer complete protection against particles, and a good level of protection against water, up to water projected by a nozzle against front panel from any direction.



Anti-shedding Design

A cable clamp allows cable to be fixed on back of monitor so that it won't come out under any vibration



Input Voltage 12-24V

Wide range of input voltages, which is a choice for different application environments

1000 nits & 10-Point Capacitive Touch


Selection of high-quality industrial-grade screen on the market, which not only has prominent color representation, but also high brightness of 1000 nits screen makes it suitable for outdoor sunlight environment.



Rich Interfaces

In addition to the interfaces shown, the engineers have creatively reserved a number of expansion ports on the mainboard that can be uniquely customized for different requests. The readily replaceable sheet metal also provides a great deal of ease in modifying the interfaces.

INDUSTRIAL HMI

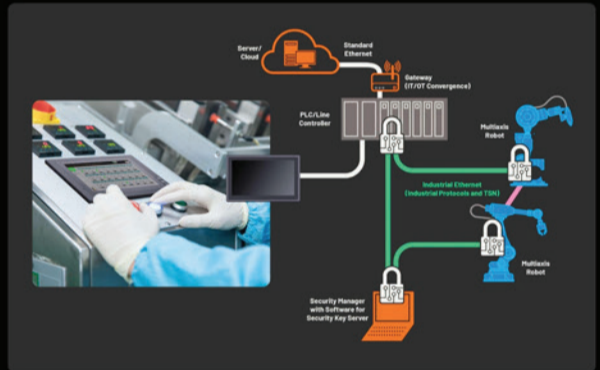

Industrial HMI Applications


Due to increasingly developed world of industrial automation, HMI are used in a wide range of applications. As the controlling and monitoring core of automated processes, stability, efficiency and environmental adaptability are particularly important. Therefore, it is adapted to different scenarios.



Specifications

DISPLAY	Touch Screen	10-point capacitive touch (no touch available)
	Panel	15.6" LCD
	Physical Resolution	1920x1080
	Aspect Ratio	16:9
	Brightness	1000 nits
	Contrast	1000:1
	Viewing Angle	160° / 160° (H/V)
INPUT	HDMI	1 x HDMI 1.4b
	VGA	1
	AV	1
SUPPORTED FORMATS	HDMI	2160p 24/25/30, 1080p 24/25/30/50/60, 1080i 50/60, 720p 50/60...
	Speaker	2
AUDIO IN/OUT	HDMI	2ch
	Ear Jack	3.5mm - 2ch 48kHz 24-bit
POWER	Input Voltage	DC 12-24V
	Power Consumption	≤24.5W (15V)
ENVIRONMENT	Operating Temperature	-20°C~60°C
	Storage Temperature	-30°C~70°C
	Water-proof	IP x4 front panel
DIMENSION	Dust-proof	IP 6x front panel
	Dimension(LWD)	408mm x 259mm x 36.5mm
	VESA Mount	75mm / 100mm
	Weight	2.9kg

Structure

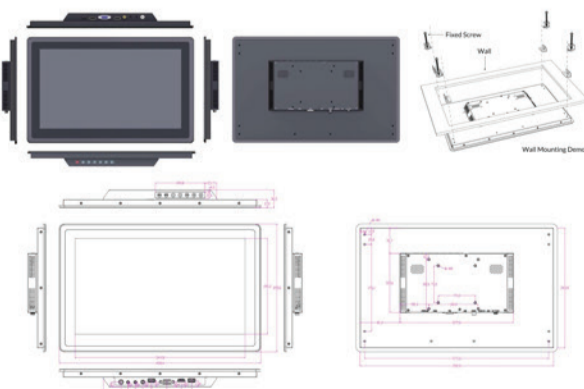

ACCESSORIES



Customized Service

(The following elements are specific to customised items and do not represent parameters of this monitor)

Interface Types



Screen Panel



Appearance Structure



Basic Appearance



Application Environment



AUSTRALIA:

Email: sales@avw.com.au
 Sydney: 02 8213 0200
 Adelaide: 088 1203 203
 Melbourne: 038 6915 210
 Queensland: 073 6073 785

NEW ZEALAND

Email: sales@avw.co.nz
 Auckland: 09 271 4000
 Wellington: 04 499 3888